

JML25




Technical Information

Max capacity	2500 kg
Battery autonomy	10 h
Power (electric engine)	48V-3kW
Battery pack	n. 8 170Ah 48V
Battery charger	n. 2 20Ah 48V
Re-charging time	5 h
Undercarriage	Double nivellement Bi-levelling
Logitudinal levelling Front	20°
Logitudinal levelling Rear	15°
Lateral levelling	+/- 14°
Hydraulic commands	Proportionnelles Proportional
Control of inclination	Automatique Automatic
Gradeability	25°
Side slope	25°
Total weight	1800 kg
Speed	2.20 km/h
Ground pressure empty	0.21 kg/cm ²
Ground pressure max capacity	0,46 kg/cm ²



Dimensions

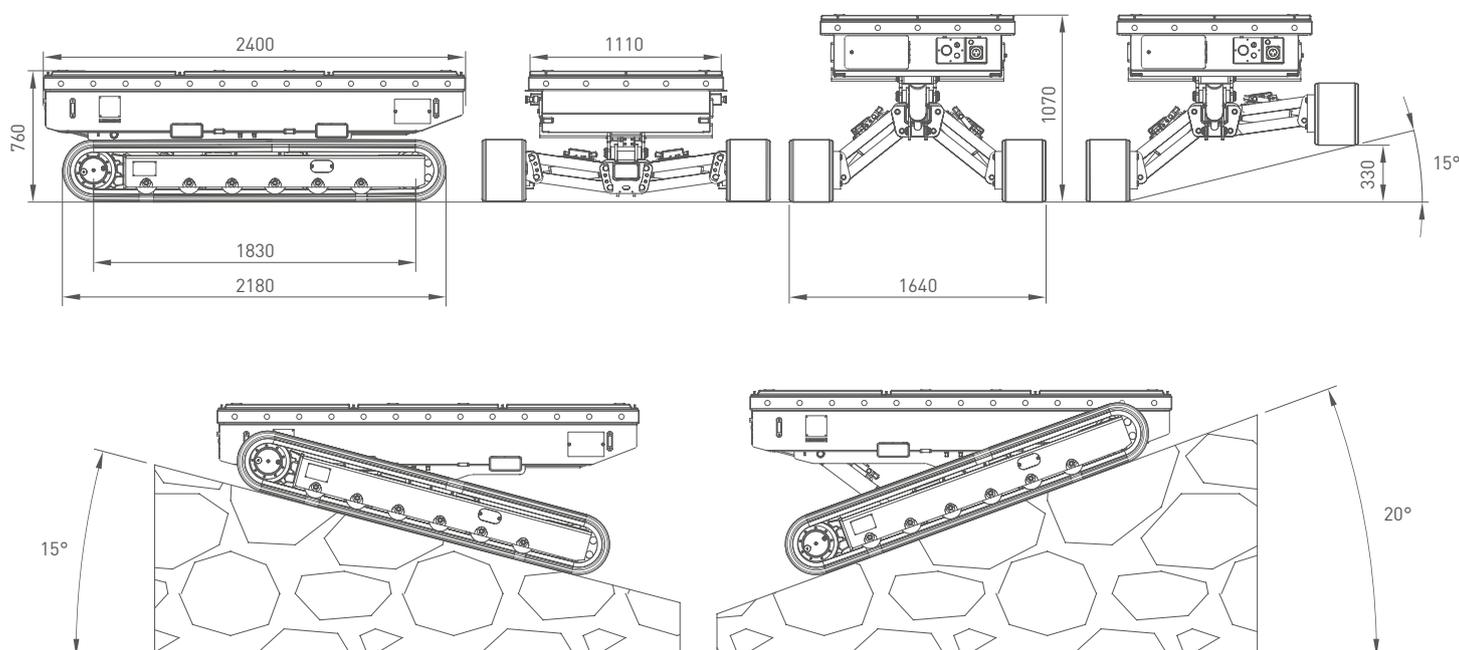

Jekko Multi Loaders

Multi-Loader is the new range of tracked loaders with double levelling and remote control.

LOADING CAPACITY 2 - 2.5 T

The new Multi Loading platform allows equipment and/or implements for all types of operations up to a max. load of 2.0 or 2.5 t to be installed. Tracked traction allows all types of ground to be operated on, with the possibility of smoothly and precisely manoeuvring even in narrow spaces, offering the lowest pressure on ground.



SELF LEVELLING

The levelling of the loading platform is automatic when driving on tracks (Dynamic Levelling), so that the machine can be operated in top safety even with sloped and/or rough grounds. Multi-Loader simultaneously compensates for longitudinal slopes of 20° (40%) and crosswise slopes of 14° (25%), with a full integrity of the handled material.

AUTONOMY

The innovative Lead Cristal Battery Power-Pack ensures long operativeness in a mixed cycle, offering a max. inching speed of 2.2 km/h.

A high frequency battery charger is installed directly inside the main chassis and charges the Multi-Loader in five hours only, while an auxiliary electric pump (220V - 2.2kW) allows the loader to be used also while batteries are being charged.

BATTERY POWERED

Eco-friendly and noiseless, the new Multi-Loader range offers top use versatility in both inside and outside areas.



Jekko srl

Via Campardone, 1 - 31014 Colle Umberto (TV) Italy
info@jekko.it - www.jekko-cranes.com